

# Bimetal Thermometers, Rigid Mount

Crimped-on ring case stainless steel

**TBiSChg**  
**TBiSChgG**

## Standard Versions

This data sheet contains detailed information on our standard versions and available options. In overview 8000 you will find additional information on selection, metrological features, permissible ambient and storage temperatures as well as error limits, etc. Information on the metrologically optimal design of thermometers can be found in our technical information sheet T08-000-031.

### Measuring Unit

Bimetal coil

### Accuracy (DIN EN 13 190)

Class 1

### Case

With polished crimped-on ring, stainless steel 1.4301 (304)

### Degree of Protection (DIN EN 60 529/IEC 529)

IP65

### Case Filling

For model TBiSChgG

Temperature ranges:

from -20 °C up to +100 °C: glycerin

from -40 °C and above +100 °C up to +250 °C: silicone oil

### Nominal Case Sizes

63, 80, 100, 125, 160 mm (2½, 3, 4, 5, 6")

### Case Configuration

Connection temperature sensor (stem):

- rigid mount with neck tube

Stem position:

- vertical bottom position (not for NCS 160)

- centre back position (**rm**):

for stem B1 and B4.1 without neck tube

Mounting device:

- without

### Temperature Ranges (DIN EN 13 190)

Temperature differences from 60 K up to 600 K

### Temperature Sensor (Stem)

Made of stainless steel 1.4571 (316Ti)

Max. static operating pressure: 25 bar

Stem models: B1, B3, B4, B4.1, B5 or B6

Stem Ø dF: 6 or 8 mm

Stem length L: from Lmin or L1min up to 400 mm

Please regard the minimum stem length depending on active length (La) and stem model, see page 3

### Window

Instrument glass

### Dial

Aluminum white, scale black

### Pointer

Aluminum black

### Indication Adjustment (±4 %)

Externally via screw



## Ordering Information, Standard Ranges, Options

See page 4

## Special Versions and Further Options

- Other connection threads and materials upon request
- Other temperature ranges and/or special scales, e.g. dual scale °C/°F, coloured fields or ranges, dial inscriptions
- Case parts stainless steel 1.4404 (316L) upon request
- Model TBiSChg for ambient temperatures to -60 °C;  
Model TBiSChgG for ambient temperatures to -40 °C;  
to -60 °C NCS 100, 125 and 160
- Position of connection radial at 3 o'clock, 9 o'clock, 12 o'clock, others upon request or other than vertical installation (90°)
- GOST version for Russia, Ukraine, Kazakhstan, Belarus

## Thermowells

See data sheets 8.8110 ff.



Sales and Export South, West, North

**ARMATURENBAU GmbH**

Manometerstraße 5 • D – 46487 Wesel-Ginderich  
Tel.: +49 2803 9130 – 0 • Fax: +49 2803 1035  
www.armaturenbau.com • mail@armaturenbau.com

Subsidiary Company, Sales and Export East

**MANOTHERM Beierfeld GmbH**

Am Gewerbepark 9 • D – 08344 Grünhain-Beierfeld  
Tel.: +49 3774 58 – 0 • Fax: +49 3774 58 – 545  
www.manotherm.com • mail@manotherm.com

**8102**

04/18

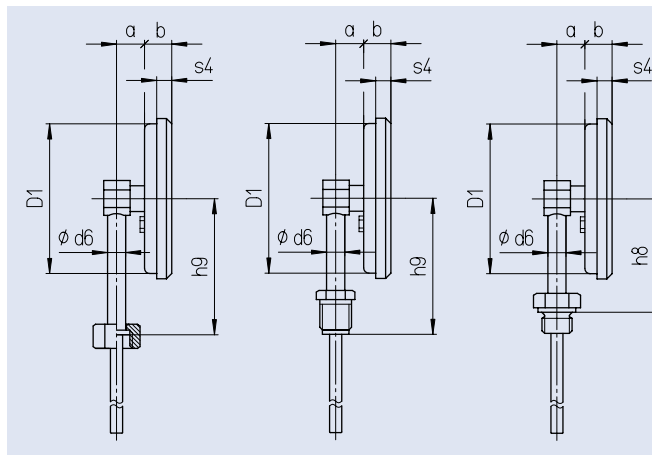
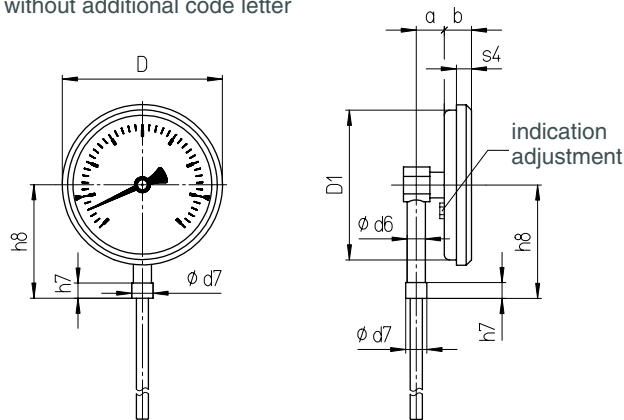
# Stem Position, Code Letters, Dimensional Data and Weights

## Vertical Bottom Stem Position

Stem model B1 (also B5)

Stem model B3 (also B6) Stem model B4 Stem model B4.1

without additional code letter





## Centre Back Stem Position

Stem model B1 (also B5)

Stem model B3 (also B6)


Stem model B4

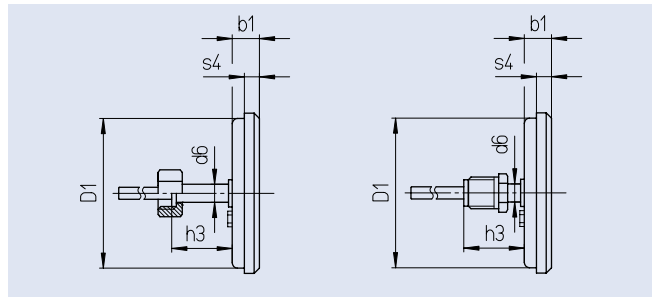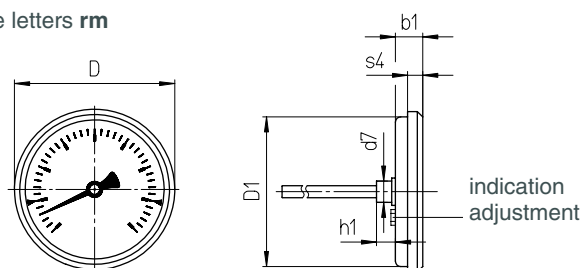code letters rm



Stem model B4.1  
without neck tube (standard)

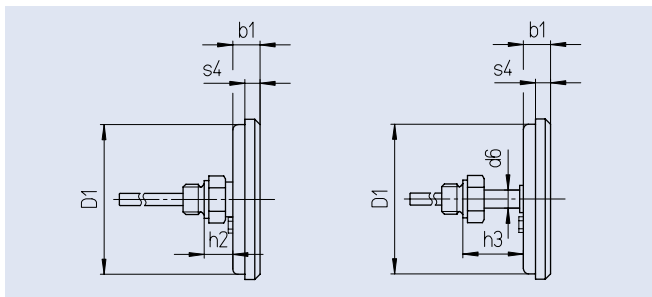Stem model B4.1  
with neck tube (option)



## Dimensional Data (mm) and Weights (kg)

NCS	a	b	b1	D	D1	d6	d7	h1 <sup>4)</sup>	h2 <sup>4)</sup>	h3 <sup>1)4)</sup>	h7	h8 <sup>4)</sup>	h9 <sup>4)</sup>	s4	approx. weight <sup>2)</sup>	
															TBiSChg	TBiSChgG
63	18.5	17	17	67	62	12	14	12.5	19	40	10.5	55	70	8	0.18	0.20
80	18.5	18	18	86	79	12	14	12.5	19	40	10.5	65	80	8	0.22	0.27
100	18.5	18	18	106	98	12	14	12.5	19	40	10.5	75	90	10	0.29	0.37
125	18.5	20	20	136	125	12	14	12.5	19	40	10.5	85	102	11	0.36 <sup>3)</sup>	0.47 <sup>3)</sup>
160	—	—	21	167	159	12	14	12.5	19	40	—	—	—	11	0.46 <sup>3)</sup>	0.66 <sup>3)</sup>





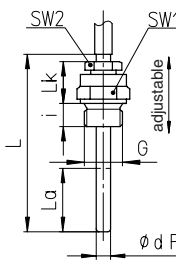
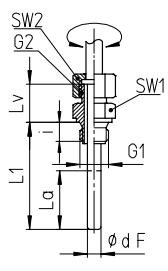
<sup>1)</sup> Stem model B4 with G $\frac{3}{4}$  B: 50 mm

<sup>2)</sup> The data are examples and relate to the version with stem B1, Ø 8 mm, length 100 mm.

<sup>3)</sup> Valid for model ...rm

<sup>4)</sup> Temperature ranges  $\geq 400$  °C: extended neck tube for small stem lengths, see T08-000-031

# Stem Models

Stem Models		Without screw fitting, plain stem																																																																															
<b>Process connection:</b>	<b>Without screw fitting, plain stem</b>																																																																																
<b>Stem model:</b>	<b>B1</b>																																																																																
<b>Form acc. to DIN EN 13 190:</b>	Form 1																																																																																
<b>Stem material:</b>	1.4571																																																																																
<b>Stem Ø dF:</b>	6 or 8 mm																																																																																
<b>Order length:</b>	L																																																																																
<b>Suitable thermowell models:</b> (data sheet)	SK1 (8.8140), SK2 (8.8141) SK3.B (8.8150), SK4.B (8.8151)																																																																																
																																																																																	
<b>Process connection:</b>	<b>Union nut</b>	<b>Male thread, turnable</b>	<b>Male thread, rigid</b>																																																																														
<b>Stem model:</b>	<b>B3</b>	<b>B4</b>	<b>B4.1</b>																																																																														
<b>Form acc. to DIN EN 13 190:</b>	Form 5	Form 4	Form 6 (cylindrical thread) Form 7 (conical thread)																																																																														
<b>Stem material:</b>	1.4571	1.4571	1.4571																																																																														
<b>Stem Ø dF:</b>	6 or 8 mm	6 or 8 mm	6 or 8 mm																																																																														
<b>Screw fitting material:</b>	1.4571	1.4571	1.4571																																																																														
<b>Order length:</b>	L	L	L																																																																														
<b>Suitable thermowell models:</b> (data sheet)	SF4.1 (8.8111), SF4.1F (8.8113) SF8 (8.8130), SF9 (8.8131)	SF4 (8.8110), SF4F (8.8112) SF5 (8.8120), SF6, SF7 (8.8121)	SF4 (8.8110), SF4F (8.8112) SF5 (8.8120), SF6, SF7 (8.8121)																																																																														
																																																																																	
<b>Thread (dimensional data in mm):</b>	<table border="1"> <thead> <tr> <th>G</th> <th>SW</th> <th>i</th> </tr> </thead> <tbody> <tr><td>G 1/2</td><td>27</td><td>10</td></tr> <tr><td>G 3/4</td><td>32</td><td>12</td></tr> <tr><td>M20x1.5</td><td>27</td><td>10</td></tr> <tr><td>M24x1.5</td><td>32</td><td>12</td></tr> <tr><td>M27x2</td><td>32</td><td>12</td></tr> </tbody> </table>	G	SW	i	G 1/2	27	10	G 3/4	32	12	M20x1.5	27	10	M24x1.5	32	12	M27x2	32	12	<table border="1"> <thead> <tr> <th>G</th> <th>SW</th> <th>i</th> </tr> </thead> <tbody> <tr><td>G 1/2 B</td><td>22</td><td>20</td></tr> <tr><td>G 3/4 B</td><td>27</td><td>23</td></tr> <tr><td>M18x1.5</td><td>22</td><td>14</td></tr> <tr><td>M20x1.5</td><td>22</td><td>20</td></tr> </tbody> </table>	G	SW	i	G 1/2 B	22	20	G 3/4 B	27	23	M18x1.5	22	14	M20x1.5	22	20	<table border="1"> <thead> <tr> <th>G</th> <th>SW</th> <th>i</th> </tr> </thead> <tbody> <tr><td>G 1/2 B</td><td>27</td><td>14</td></tr> <tr><td>G 3/4 B</td><td>32</td><td>16</td></tr> <tr><td>1/2" NPT</td><td>27</td><td>19</td></tr> <tr><td>3/4" NPT</td><td>27</td><td>19</td></tr> <tr><td>M18x1.5</td><td>24</td><td>14</td></tr> <tr><td>M20x1.5</td><td>27</td><td>14</td></tr> </tbody> </table>	G	SW	i	G 1/2 B	27	14	G 3/4 B	32	16	1/2" NPT	27	19	3/4" NPT	27	19	M18x1.5	24	14	M20x1.5	27	14																								
G	SW	i																																																																															
G 1/2	27	10																																																																															
G 3/4	32	12																																																																															
M20x1.5	27	10																																																																															
M24x1.5	32	12																																																																															
M27x2	32	12																																																																															
G	SW	i																																																																															
G 1/2 B	22	20																																																																															
G 3/4 B	27	23																																																																															
M18x1.5	22	14																																																																															
M20x1.5	22	20																																																																															
G	SW	i																																																																															
G 1/2 B	27	14																																																																															
G 3/4 B	32	16																																																																															
1/2" NPT	27	19																																																																															
3/4" NPT	27	19																																																																															
M18x1.5	24	14																																																																															
M20x1.5	27	14																																																																															
		<b>Thermowell required!</b>																																																																															
<b>Process connection:</b>	<b>Male thread/compression fitting</b>	<b>Male thread, turnable/double male adapter</b>																																																																															
<b>Stem model:</b>	<b>B5</b>	<b>B6</b>																																																																															
	(B1 with compression fitting)	(B3 with double male adapter)																																																																															
<b>Form acc. to DIN EN 13 190:</b>	Form 2 (cylindrical thread) Form 3 (conical thread)	—																																																																															
<b>Stem material:</b>	1.4571	1.4571																																																																															
<b>Stem Ø dF:</b>	6 or 8 mm	6 or 8 mm																																																																															
<b>Screw fitting material:</b>	1.4571	1.4571																																																																															
<b>Order length:</b>	L	L1																																																																															
<b>Suitable thermowell models:</b> (data sheet)	SF4 (8.8110), SF4F (8.8112) SF5 (8.8120), SF6, SF7 (8.8121)	SF4 (8.8110), SF4F (8.8112) SF5 (8.8120), SF6, SF7 (8.8121)																																																																															
																																																																																	
<b>Thread (dimensional data in mm):</b>	<table border="1"> <thead> <tr> <th>G</th> <th>SW1</th> <th>SW2</th> <th>i</th> <th>Lk</th> </tr> </thead> <tbody> <tr><td>G 1/2 B</td><td>27</td><td>22</td><td>14</td><td>42</td></tr> <tr><td>G 3/4 B</td><td>32</td><td>22</td><td>16</td><td>42</td></tr> <tr><td>1/2" NPT</td><td>27</td><td>22</td><td>19</td><td>42</td></tr> <tr><td>3/4" NPT</td><td>27</td><td>22</td><td>19</td><td>42</td></tr> <tr><td>M20x1.5</td><td>27</td><td>22</td><td>14</td><td>42</td></tr> </tbody> </table>	G	SW1	SW2	i	Lk	G 1/2 B	27	22	14	42	G 3/4 B	32	22	16	42	1/2" NPT	27	22	19	42	3/4" NPT	27	22	19	42	M20x1.5	27	22	14	42	<table border="1"> <thead> <tr> <th>G1</th> <th>G2</th> <th>SW1</th> <th>SW2</th> <th>i</th> <th>Lv</th> </tr> </thead> <tbody> <tr><td>G 1/2 B</td><td>G 1/2 B</td><td>27</td><td>27</td><td>14</td><td>28</td></tr> <tr><td>G 3/4 B</td><td>G 1/2 B</td><td>32</td><td>27</td><td>16</td><td>28</td></tr> <tr><td>1/2" NPT</td><td>G 1/2 B</td><td>27</td><td>27</td><td>19</td><td>28</td></tr> <tr><td>3/4" NPT</td><td>G 1/2 B</td><td>27</td><td>27</td><td>19</td><td>28</td></tr> <tr><td>M20x1.5</td><td>M20x1.5</td><td>27</td><td>27</td><td>14</td><td>28</td></tr> <tr><td>M24x1.5</td><td>M20x1.5</td><td>32</td><td>27</td><td>14</td><td>28</td></tr> <tr><td>M27x2</td><td>M20x1.5</td><td>32</td><td>27</td><td>16</td><td>28</td></tr> </tbody> </table>		G1	G2	SW1	SW2	i	Lv	G 1/2 B	G 1/2 B	27	27	14	28	G 3/4 B	G 1/2 B	32	27	16	28	1/2" NPT	G 1/2 B	27	27	19	28	3/4" NPT	G 1/2 B	27	27	19	28	M20x1.5	M20x1.5	27	27	14	28	M24x1.5	M20x1.5	32	27	14	28	M27x2	M20x1.5	32	27	16	28
G	SW1	SW2	i	Lk																																																																													
G 1/2 B	27	22	14	42																																																																													
G 3/4 B	32	22	16	42																																																																													
1/2" NPT	27	22	19	42																																																																													
3/4" NPT	27	22	19	42																																																																													
M20x1.5	27	22	14	42																																																																													
G1	G2	SW1	SW2	i	Lv																																																																												
G 1/2 B	G 1/2 B	27	27	14	28																																																																												
G 3/4 B	G 1/2 B	32	27	16	28																																																																												
1/2" NPT	G 1/2 B	27	27	19	28																																																																												
3/4" NPT	G 1/2 B	27	27	19	28																																																																												
M20x1.5	M20x1.5	27	27	14	28																																																																												
M24x1.5	M20x1.5	32	27	14	28																																																																												
M27x2	M20x1.5	32	27	16	28																																																																												
<b>Minimum Stem Length and Active Length (mm)</b>																																																																																	
			<b>Stem Ø dF:</b>																																																																														
			<b>6</b>		<b>8</b>																																																																												
			<b>Span ΔT<sup>1)</sup></b>																																																																														
<b>Stem model:</b>	<b>Length:</b>	<b>Thread:</b>	≥ 100 K	= 80 K	= 60 K	≥ 80 K	= 60 K																																																																										
<b>all models</b>	L <sub>a</sub>	all standard threads	40	60	70	40	60																																																																										
<b>B1 / B4</b>	L <sub>min</sub>	all standard threads	45	65	75	45	65																																																																										
<b>B3</b>	L <sub>min</sub>	all standard threads	52	72	82	52	72																																																																										
<b>B4.1</b>	L <sub>min</sub>	all standard threads	60	80	90	60	80																																																																										
<b>B5</b>	L <sub>min</sub>	all standard threads	95	115	125	95	115																																																																										
<b>B6</b>	L <sub>1min</sub>	all standard threads	60	80	90	60	80																																																																										
<b>others</b>			upon request		upon request																																																																												
			<p><b>The minimum length L<sub>min</sub>/L<sub>1min</sub> is the smallest feasible stem length.</b> Important: Please note the technical information sheet T08-000-031 on the metrologically optimal stem length.</p> <p><b>The active length L<sub>a</sub> is the temperature-sensitive part of the stem.</b></p>																																																																														

<sup>1)</sup> The temperature difference (span) ΔT = 60 K corresponds e.g. to the temperature range 0–60 °C, but also to –20/+40 °C, see table page 4

